
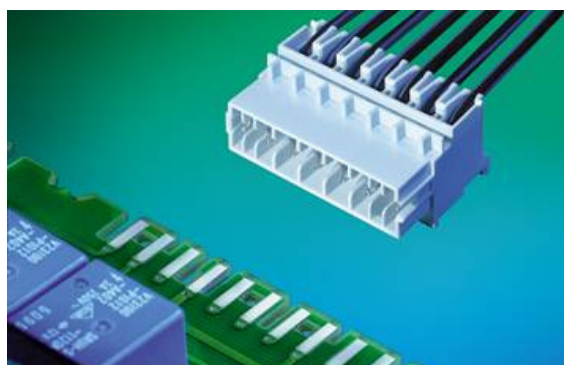


STOCKOMAT ECO-DOMO economy line

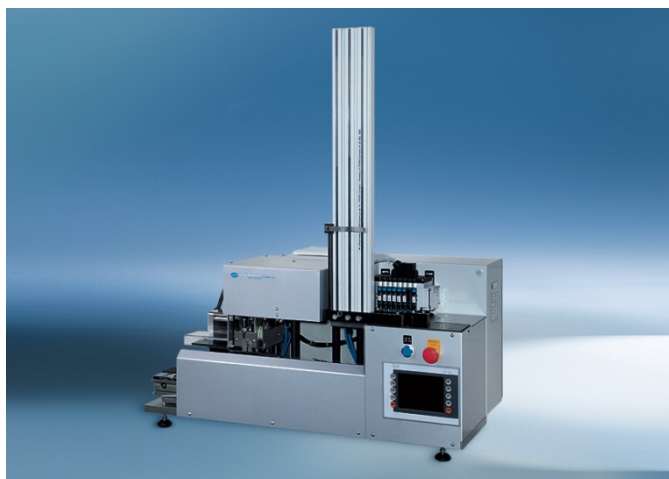

WT 255.5.0

Semi-automated terminating machine for connector system ECO-DOMO

Features

- ▣ Terminating 2-12 ways connectors
- ▣ Single wire termination
- ▣ max. load, 24 contacts
- ▣ Empty chamber programming
- ▣ Sensor trigger
- ▣ manual cover closing station
- ▣ Monitoring of spring support unit by a positioning sensor and cutting from incorrect cable
- ▣ low setting up times
- ▣ economical tube package
- ▣ Bench mounted

Technical data

Drive	pneumatic
Operating voltage	230V/ 50-60 Hz 100-110 V, without additional transformer
Current load	4 A
Connected load	0.9 kW
Operating pressure	6.5 bar
Ambient temperature	max. 40 ° C
Dimensions:	
Length	914 mm
Width	469 mm
Height (without magazine)	573 mm
Weight	81 kg
Cycle time at single stroke operation	1.2 sec.
Typical assembly performance	1200 contacts/h (operator dependent)
Min. cable length suitable for assembly:	
one-side connected	50 mm
two sided connected	100 mm


STOCKOMAT ECO-DOMO economy line



Connector series ECO-DOMO

<i>ECO-DOMO</i>	<i>Wire size</i>	<i>Indirect connector</i>	<i>Direct connector</i>
MF 9260	0,35 - 1,50 mm ²	X	
MF 9261	0,35 - 1,50 mm ²	X	
MF 9264	0,35 - 1,50 mm ²	X	
MF 9285	0,35 - 1,50 mm ²	X	
MF 9286	0,35 - 1,50 mm ²	X	
MF 9290	0,50 - 0,75 mm ²		X
MF 9270	0,50 - 0,75 mm ²		X
MF 9271	0,50 - 0,75 mm ²		X
MF 9560	0,35 - 1,50 mm ²	X	
MF 9561	0,35 - 1,50 mm ²	X	
MF 9562	0,35 - 1,50 mm ²	X	
MF 9564	0,35 - 1,50 mm ²	X	
MF 9585	0,35 - 1,50 mm ²	X	
MF 9586	0,35 - 1,50 mm ²	X	
MF 9588	0,35 - 1,50 mm ²	X	
MF 9590	0,50 - 0,75 mm ²		X

Packet magazines

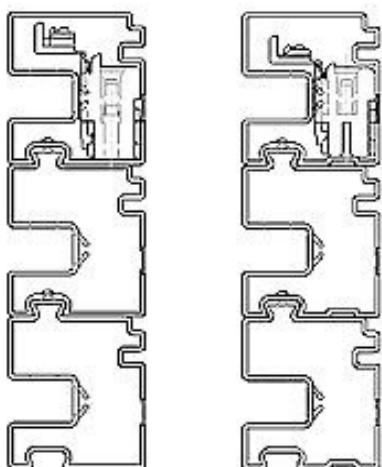

ECO-DOMO
indirect

ECO-DOMO
direct

Packing unit

<i>Positions</i>	<i>Standard packing/ peaces</i>
2	2160
3	1440
4	1080
5	870
6	720
7	600
8	540
9	480
10	420
11	390
12	360